


S/C TRANSPARENT SPEAKER WIRE

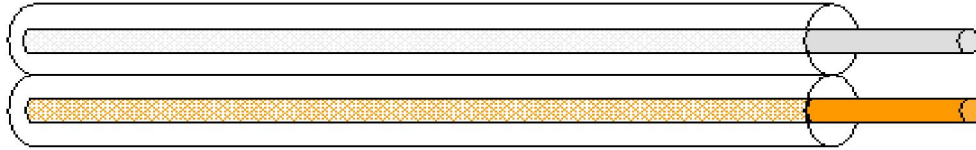

TOP P/N	HY NO.	NO. OF COND.	ACRE (MM2)	COND. STRAND	INSULATION THICKNESS (MM)	NORMAL O.D. (MM)
01.037.0196	SPSC2050	2	0.5	64/0.10	0.54	2.0X4.0
01.037.0197	SPSC2075	2	0.75	96/0.10	0.64	2.4X4.8
01.037.0027	SPSC2100	2	1.0	7*18/0.10	0.86	3.2X6.4
01.037.0028	SPSC2150	2	1.5	7*27/0.10	0.71	3.5X7.0
01.037.0220	SPSC2201	2	2.0	7*36/0.10	1.46	5.0X10.0
01.037.0029	SPSC2202	2	2.0	7*36/0.10	0.81	3.7X7.4
01.037.0222	SPSC2251	2	2.5	7*45/0.10	1.83	6.0X12.0
01.037.0032	SPSC2253	2	2.5	7*45/0.10	1.09	4.5X9.0
01.037.0031	SPSC2252	2	2.5	7*45/0.10	0.84	4.0X8.0
01.037.0225	SPSC2400	2	4.0	7*54/0.10	1.23	5.0X10.0

PRODUCT CONSTRUCTURE:

Conductor: one tinned stranded copper, one stranded bare copper
Insulation / Jacket: Clear PVC

APPLICATIONS:

- 1 Digital audio
- 2 Hi-Fi and stereo speaker wire
- 3 Jukeboxes
- 4 Not for in wall use
- 5 Home theater

COMPLIANCE: RoHS compliant Directive 2002/95/EC

PACKAGE: 100meters with plastic spool
