


W/B SPEAKER WIRE

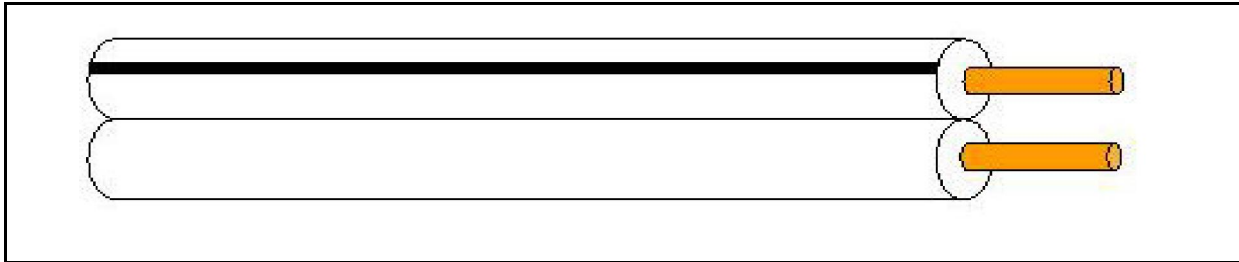

TOP P/N	HY NO.	NO. OF COND.	COND. STRAND	INSULATION THICKNESS (MM)	NORMAL O.D. (MM)
01.037.0066	SPWB2035	2	45/0.10	0.61	2.0X4.0
01.037.0068	SPWB2050	2	64/0.10	0.54	2.0X4.0
01.037.0071	SPWB2075	2	96/0.10	0.64	2.4X4.8
01.037.0073	SPWB2100	2	7*18/0.10	0.86	3.2X6.4
01.037.0075	SPWB2150	2	7*27/0.10	0.85	3.5X7.0
01.037.0077	SPWB2200	2	7*36/0.10	0.71	3.5X7.0
01.037.0239	SPWB2250	2	7*45/0.10	0.59	3.5X7.0
01.037.0083	SPWB2300	2	7*54/0.10	0.98	4.5X9.0

PRODUCT CONSTRUCTURE:

Conductor: annealed bare copper, stranded
Insulation / Jacket: PVC, white color with black line

APPLICATIONS:

- 1 Digital audio
- 2 Hi-Fi and stereo speaker wire
- 3 Jukeboxes
- 4 Not for in wall use
- 5 Home theater

COMPLIANCE: RoHS compliant Directive 2002/95/EC

PACKAGE: 100meters with plastic spool

