


Order code: 001-1-016-3-B1STF-XT0

1) IC-SOCKETS, STRIPS, CARRIERS


Series: **001**

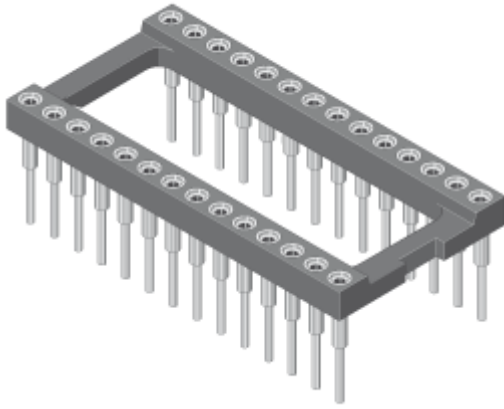


IC-sockets with machined contacts in all common pin counts and row spacing's. Versions with decoupling capacitor are also available.

Sockets without centre bar.

Gender	Female
Pitch (mm)	2,54
Mating pin size (range)	ø 0,40-0,56, ? 0,25x0,45
No of contacts	16
Row distance (code)	300 mil
Contact type	B1 - Standard B



Material contact	Copper alloy
Material clip	Beryllium copper
Plating contact	Sn
Plating clip	Au
Insulator Style	No Bar
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	1000 V _{RMS} for 1 minute
Operating temperature	-55°C to +125°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	Without cap
D (Row dist. mm)	7,62
A	20,30
B	10,10
C	4,40

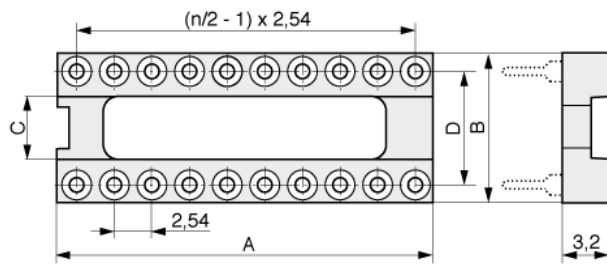

Order code: 001-1-016-3-B1STF-XT0



MPE Garry GmbH
 Schäfflerstraße 13
 87629 Füssen/Germany
 Phone: +49 (0) 83 62 / 91 56-0
 Fax: +49 (0) 83 62 / 91 56-500
 Email: vk@mpe-connector.de

Date: 05.09.2012 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=001-1-016-3-B1STF-XT0