


533


.156"(3.96mm) Friction Lock Header and Crimp Housing and Contact 02 to 20 Contacts

Technical Data :


Insulator Material:	Thermoplastic,UL 94V-0
Contact :	0.64x0.64mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickle
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .

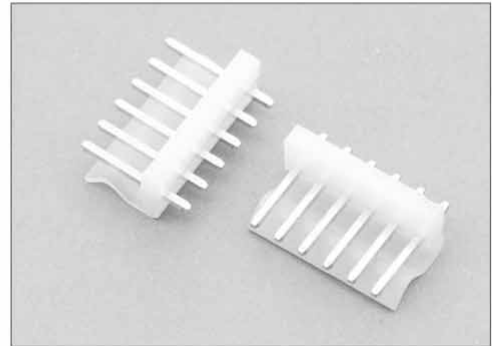

RoHS Compliant

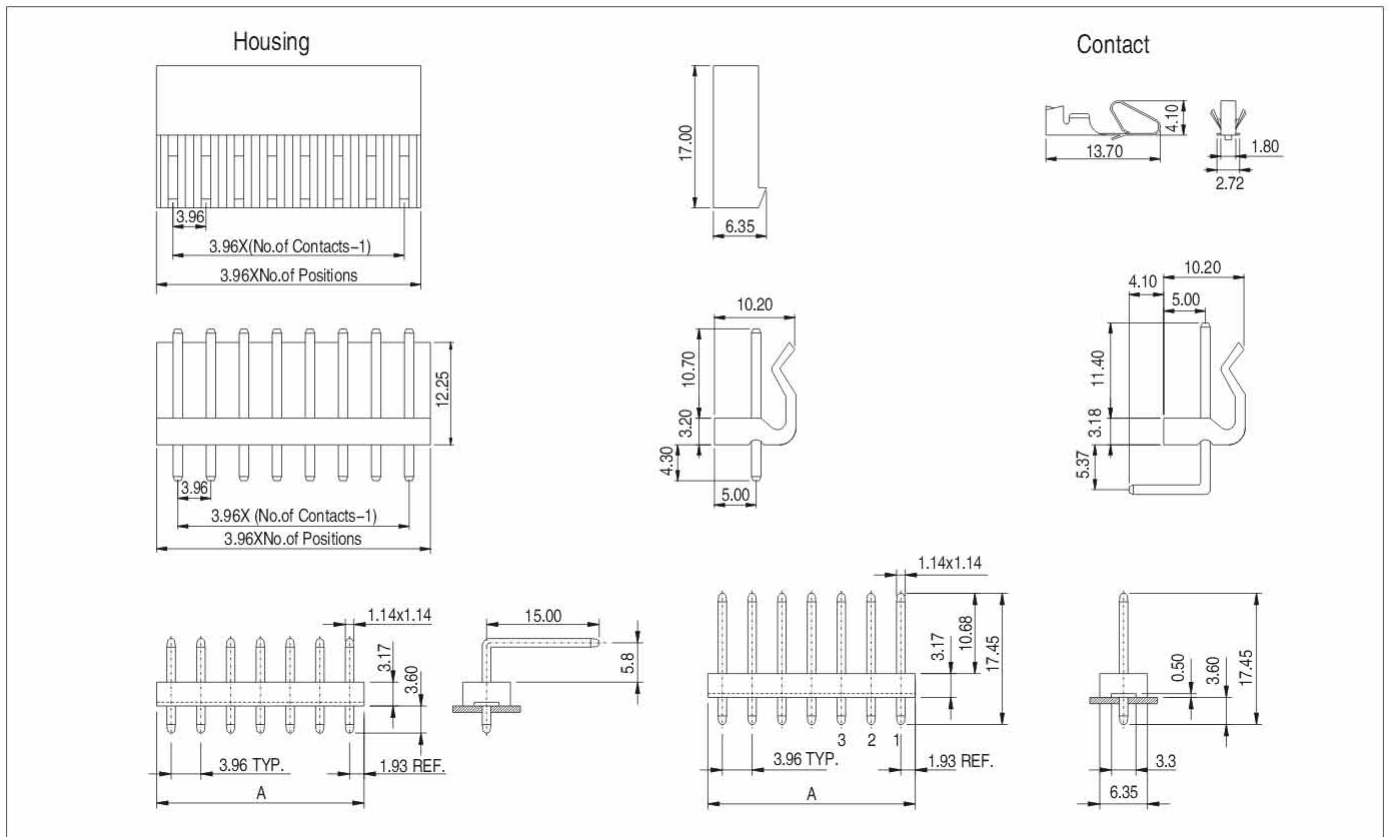

How to order



Nr. of contact	code
02~20	02~20

Connector type	Code
Housing	1
Contact	2
Friction Lock Header Straight	3
Friction Lock Header Right Angle	4
W/O Lock Header straight	5
W/O Lock Header Right Angle	6

Plating	Code
Gold Plated	10
Tin Plated	50
Omit for Housing	

W.E.