


146,147

Pin-Header-Strips-Single/Double row -2.54 mm pitch-Right angle


Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	157,158,159,160,162,342,622,624,625

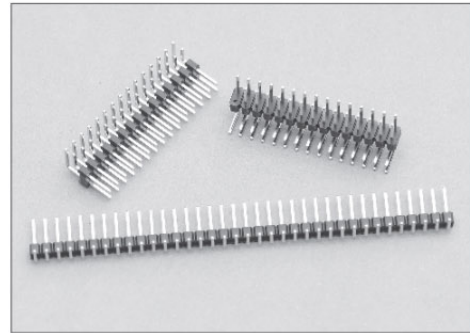


RoHS Compliant


146 serie

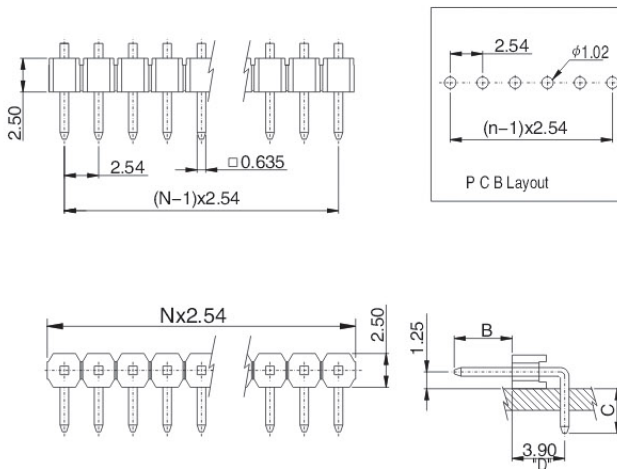

147 serie

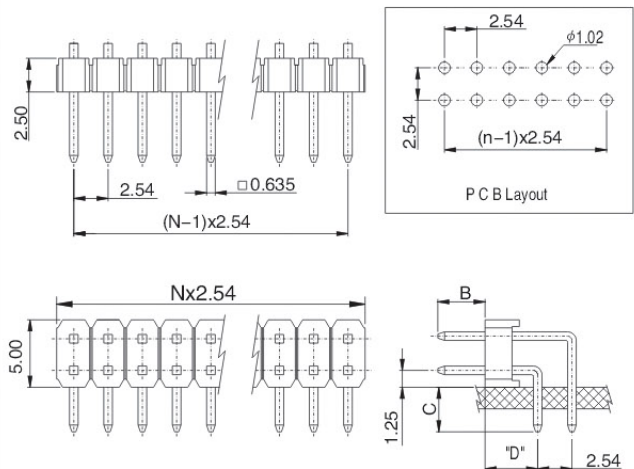


Also Available




Cap option	Cap Length
PIN ≤ 3	L=5.0mm
PIN > 3	L=10.0mm

Also Available



Cap option	Cap Length
PIN ≤ 6	L=5.0mm
PIN > 6	L=10.0mm

How to order

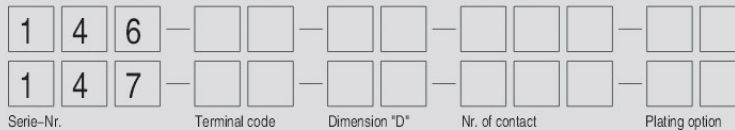

Terminal code	Dimensions(mm)		Terminal code	Dimensions(mm)	
	B	C		B	C
12	3.50	3.30	18	13.80	3.30
13	4.80	3.30	19	15.00	3.30
14	6.10	3.30	20	17.10	3.30
15	6.90	3.30	xxx/xx	As request For Eg.	
16	9.90	3.30		B=6.50, C=3.0	
17	12.00	3.30		Code Nr.=6.50/3.0	

Number of contact	Code
01-50-poles Single	01-50
04-100-poles Double	004-100

Dimensions "D"	Code
3.90	10
4.10	20
As request For Eg. D=4.0	XX
Code Nr.=4.0	

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place pad	Code
W / Cap	1
W / O Cap	2

W.E.