


# Production Drawing

File	Version	Page
WI06A39R003	A	1/2

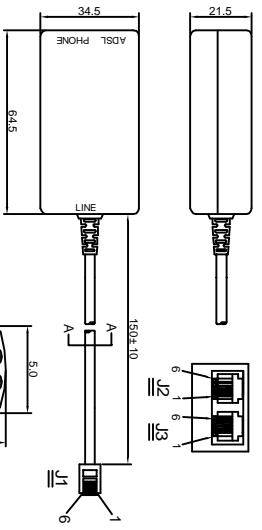

NO	Material Name	Unit Qty	Specification
1	Phone Line	1	28XW09/0720/38/372/498 1.9mm F4620/240
2	Plug	1PCS	6P2C 3U
3	PCB Jack	1PCS	6P2C 629P9 JACK KCM010
4	PCB	1PCS	60.8*27.8mm 94-V0
5	Plastic	1PCS	KXNET-046 Cover ABS/KCM010
6	Plastic	1PCS	KXNET-046 Bottom cover ABS/KCM010
7	Inductor	2PCS	DR8112 3.6mH ±5% 2W P=5.0mm
8	Inductor	2PCS	DR1012 60mH ±5% 2W P=5.5mm
9	Capacitor	2PCS	273J 400V/P=7.5mm
10	Capacitor	2PCS	562J 250V/P=5.0mm
11	SR	1PCS	PVC-48P


### contact method

- J1 PCB 2Z J3
- GN 3—GN—3—3
- RD 4—RD—4—4

APPROVED	Tolerance:	P/N:	KXNET-046	Customer:	Topelcom
CHECKED	xx±1	Order code:		Customer Approval:	
DESIGNED	xxxx 0.5	Drawing Date:	2007.11.15		
DRAWN	xxxxx0.1				
	UNIT: mm				

# Production Drawing

File	Version	Page
WI06A39R003	A	2/2

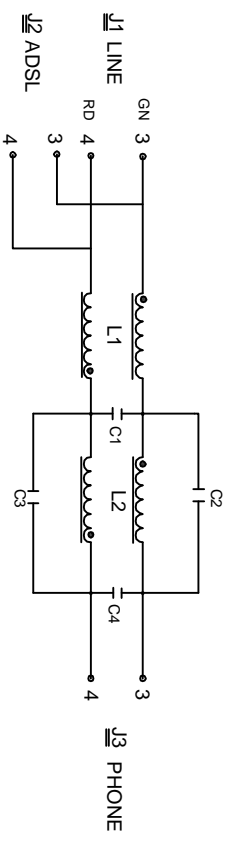

- L1: 362J
- L2: 602J
- C1=C4: 273J/400V
- C2=C3: 562J/250V.

APPROVED	Tolerance:	P/N:	KXNET-046	Customer:	Topelcom
CHECKED	xx±1	Order code:		Customer Approval:	
DESIGNED	xxxx 0.5	Drawing Date:	2007.11.15		
DRAWN	xxxxx0.1				
	UNIT: mm				