


Υλικό κατασκευής: Nylon 66, 94V - 2
 Θερμοκρασία λειτουργίας: -40°C έως +85°C
 Διατίθενται σε λευκό & μαύρο χρώμα
 Συσκευασία 100τεμ.

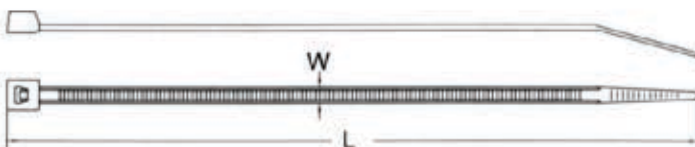

ΤΥΠΟΣ	ΚΩΔΙΚΟΣ	ΜΗΚΟΣ L (mm)	ΠΛΑΤΟΣ W (mm)	ΔΙΑΜΕΤΡΟΣ ΖΕΥΞΗΣ E (mm)	ΑΝΤΟΧΗ ΣΕ ΚΙΛΑ
CV-075	02.012.0001/0002	75	2.4	15	8
CV-100	02.012.0006/0008	100	2.5	22	8
CV-120S	02.012.0010/0012	120	2.5	28	8
CV-140S	02.012.0014/0016	142	2.5	35	8
CV-165	02.012.0019/0020	165	2.5	43	8
CV-200M	02.012.0022/0024	203	2.5	55	8
CV-120	02.012.0025/0026	120	3.2	27	18
CV-150	02.012.0043/0044	150	3.6	36	18
CV-180	02.012.0053/0054	180	3.6	46	18
CV-200A	02.012.0045/0046	203	3.6	52	18
CV-250M	02.012.0047/0048	250	3.6	68	18
CV-292	02.012.0049/0050	292	3.6	82	18
CV-368S	02.012.0051/0052	368	3.6	105	18
CV-160L	02.012.0059/0060	160	4.8	39	22
CV-190	02.012.0063/0064	190	4.8	49	22
CV-200	02.012.0055/0056	203	4.6	52	22
CV-250	02.012.0068/0070	250	4.8	68	22
CV-280	02.012.0072/0074	280	4.8	77	22
CV-310	02.012.0077/0078	310	4.8	86	22
CV-368	02.012.0081/0082	368	4.8	105	22
CV-385	02.012.0085/0086	385	4.8	110	22
CV-200L	02.012.0101/0102	203	7.6	52	55
CV-240L	02.012.0103/0104	240	7.6	61	55
CV-280L	02.012.0105/0106	280	7.6	74	55
CV-340	02.012.0107/0108	340	7.6	92	55
CV-380	02.012.0109/0110	380	7.6	105	55
CV-450	02.012.0117/0118	450	8	128	80
CV-550	02.012.0119/0120	550	8	160	80
CV-762	02.012.0123/0124	762	9	227	80
CV-812	02.012.0125/0126	812	9	243	80
CV-1168	02.012.0133/0139	1168	9	356	80