



Υλικό κατασκευής: Nylon 66, 94V - 2
 Θερμοκρασία λειτουργίας: -35 °C έως +85 °C
 Διατίθενται σε λευκό & μαύρο χρώμα
 Συσκευασία 100τεμ.



 RoHS compliant
2002/95/EC

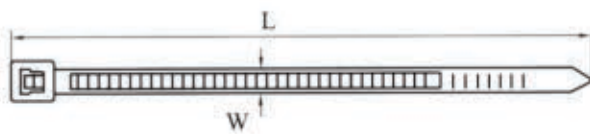

ΤΥΠΟΣ	ΚΩΔΙΚΟΣ	ΜΗΚΟΣ L (mm)	ΠΛΑΤΟΣ W (mm)	ΔΙΑΜΕΤΡΟΣ ΖΕΥΞΗΣ E (mm)	ΑΝΤΟΧΗ ΣΕ ΚΙΛΑ
CHS(PC)-3X80	02.012.0003/0004	80	2.5	2-16	8
CHS(PC)-3X100	02.012.0005/0007	100	2.5	2-22	8
CHS(PC)-3X120	02.012.0009/0011	120	2.5	2-30	8
CHS(PC)-3X150	02.012.0013/0015	150	2.5	2-35	8
CHS(PC)-3X160	02.012.0017/0018	160	2.5	2-40	8
CHS(PC)-3X200	02.012.0021/0023	200	2.5	3-50	8
CHS(PC)-4X140	02.012.0027/0028	140	3.5	3-33	18
CHS(PC)-4X150	02.012.0029/0030	150	3.5	3-35	18
CHS(PC)-4X180	02.012.0031/0032	180	3.5	3-42	18
CHS(PC)-4X200	02.012.0033/0034	200	3.5	3-50	18
CHS(PC)-4X250	02.012.0035/0036	250	3.5	3-65	18
CHS(PC)-4X280	02.012.0037/0038	280	3.5	3-70	18
CHS(PC)-4X300	02.012.0039/0040	300	3.5	3-80	18
CHS(PC)-4X370	02.012.0041/0042	370	3.5	3-102	18
CHS(PC)-5X120	02.012.0057/0058	120	4.5	3-24	22
CHS(PC)-5X180	02.012.0061/0062	180	4.5	3-42	22
CHS(PC)-5X200	02.012.0065/0066	200	4.5	3-50	22
CHS(PC)-5X250	02.012.0067/0069	250	4.5	3-65	22
CHS(PC)-5X280	02.012.0071/0073	280	4.5	3-70	22
CHS(PC)-5X300	02.012.0075/0076	300	4.5	3-82	22
CHS(PC)-5X350	02.012.0079/0080	350	4.5	3-90	22
CHS(PC)-5X380	02.012.0083/0084	380	4.7	3-102	22
CHS(PC)-5X400	02.012.0087/0088	400	4.7	3-105	22
CHS(PC)-5X450	02.012.0089/0090	450	4.7	3-130	22
CHS(PC)-8X200	02.012.0091/0092	200	6.8	3-50	38
CHS(PC)-8X250	02.012.0093/0094	250	6.8	4-63	38
CHS(PC)-8X300	02.012.0095/0096	300	7.5	4-82	55
CHS(PC)-8X350	02.012.0097/0098	350	7.5	4-90	55
CHS(PC)-8X400	02.012.0111/0112	400	7.5	4-105	55
CHS(PC)-8X450	02.012.0113/0114	450	7.5	4-118	55
CHS(PC)-8X500	02.012.0115/0116	500	7.5	4-150	55
CHS(PC)-8X750	02.012.0099/0100	750	7.5	4-220	55
CHS(PC)-9X650	02.012.0121/0122	650	9.0	8-190	80
CHS(PC)-9X920	02.012.0127/0128	920	9.0	10-265	80
CHS(PC)-9X1020	02.012.0129/0130	1020	9.0	10-295	80
CHS(PC)-9X1150	02.012.0131/0132	1150	9.0	10-310	80