


Installation Cables / PVC Insulated Single Core Installation Cables

SINGLE CORE PVC INSULATED FLEXIBLE CABLES

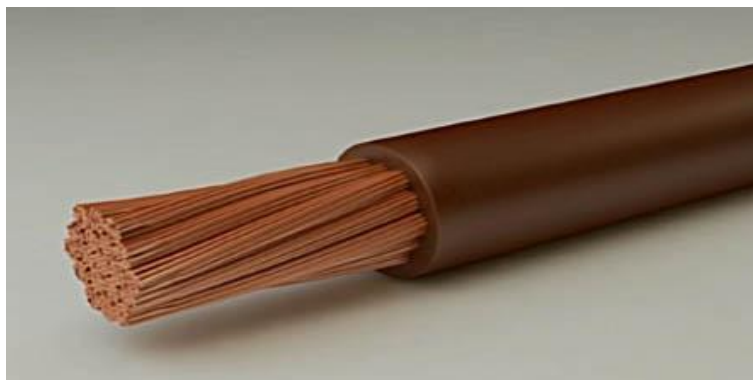

Type	: H07V-K NYAF
Standard	: VDE 281, CENELEC HD.21.3, BS6004
Construction	: 1) Conductor : EN 60228 Class 5 2) Insulation : PVC
Application	: Flexible wire, for protected installation in equipment and lighting fitting conduit or under plaster.
Technical Data	: » Max. Operating Temperature : +70°C » Rated Voltage : 450/750 V H07V-K, : 300/500 V H05V-K

RATED CROSS SECTION (mm²)	COPPER CONDUCTOR	INSULATION THICKNESS (mm)	APPROX. OVERALL DIAMETER (mm)	APPROX. NET WEIGHT (kg/km)
H07V-K 450/750 V				
1.5	27x0.25	0.70	2.90	20
2.5	45x0.25	0.80	3.50	32
4	50x0.30	0.80	4.10	46
6	76x0.30	0.80	4.80	66
10	73x0.40	1.00	6.00	111
16	119x0.40	1.00	7.20	169
25	187x0.40	1.20	8.80	262
35	255x0.40	1.20	9.70	345
50	374x0.40	1.40	11.50	501
70	336x0.50	1.40	13.30	686
95	456x0.50	1.60	15.40	928
120	576x0.50	1.60	17.20	1156
150	696x0.50	1.80	18.60	1397
185	888x0.50	2.00	21.00	1778
240	1128x0.50	2.20	25.40	2273
300	1392x0.50	2.40	27.80	2793