


Installation Cables / PVC Insulated Single Core Installation Cables

SINGLE CORE PVC INSULATED CABLES

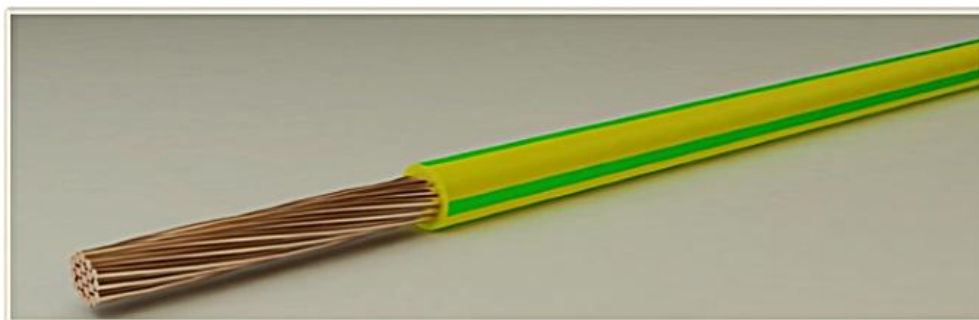

Type	: H07V-U NYA
Standard	: VDE 281, CENELEC HD.21.3, BS6004
Construction	: 1) Conductor : EN 60228 Class 1-2 2) Insulation : PVC
Application	: In dry rooms, in apparatus, switch and distribution boards, for laying in conduit on and under plaster and on insulating supports above plaster.
Technical Data	: » Max. Operating Temperature : +70°C » Rated Voltage : 450/750 V H07V-U

RATED CROSS SECTION (mm²)	COPPER CONDUCTOR	INSULATION THICKNESS (mm)	APPROX. OVERALL DIAMETER (mm)	APPROX. NET WEIGHT (kg/km)
H07V-U 450/750 V				
1,5	1.35	0.70	2.80	21
2,5	1.73	0.80	3.40	32
4	2.19	0.80	3.80	46
6	2.68	0.80	4.30	65