


## Installation Cables / PVC Insulated, PVC Sheathed Installation Cables

### PVC/PVC MULTICORE CABLES (500V)

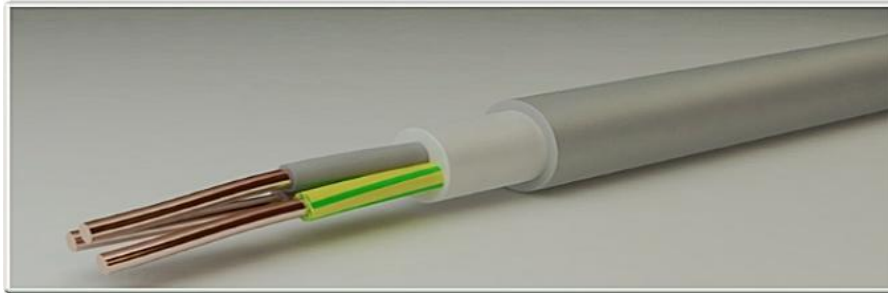

<b>Type</b>	: NYM
<b>Standard</b>	: CENELEC ( HD.21.4 )VDE 250-204
<b>Construction</b>	: 1) Conductor : EN 60228 Class 1-2 2) Insulation : PVC 3) Filler : PVC 4) Sheath : PVC
<b>Application</b>	: In dry and damp rooms, locations and store rooms subject to fire and explosions hazards, as well as for outdoor use, but not for underground laying. For permanent installation clear from or on plaster/in and under plaster.
<b>Technical Data</b>	: » Max. Operating Temperature : +70°C » Rated Voltage : 300/500 V

RATED CROSS SECTION(mm <sup>2</sup> )	COPPER CONDUCTOR	INSULATION THICKNESS (mm)	SHEATH THICKNESS (mm)	APPROX. OVERALL DIAMETER (mm)	APPROX. NET WEIGHT (kg/km)
2x1.5	1.37	0.70	1.20	8.90	119
2x2.5	1.74	0.80	1.20	10.10	162
2x4	2.20	0.80	1.20	11.00	207
2x6	2.70	0.80	1.20	12.00	264
2x10	7x1.34	1.00	1.40	15.80	463
2x16	7x1.70	1.00	1.40	18.00	644
2x25	7x2.20	1.20	1.40	21.00	938
2x35	7x2.55	1.20	1.60	23.40	1209
3x1.5	1.37	0.70	1.20	9.40	142
3x2.5	1.74	0.80	1.20	10.70	195
3x4	2.20	0.80	1.20	11.70	255
3x6	2.70	0.80	1.40	13.20	343
3x10	7x1.34	1.00	1.40	17.00	574
3x16	7x1.70	1.00	1.40	19.40	809
3x25	7x2.20	1.20	1.60	22.80	1212
3x35	7x2.55	1.20	1.60	25.00	1542
4x1.5	1.37	0.70	1.20	10.10	170
4x2.5	1.74	0.80	1.20	11.60	237
4x4	2.20	0.80	1.20	13.00	320
4x6	2.70	0.80	1.40	14.30	417
4x10	7x1.34	1.00	1.40	18.50	710
4x16	7x1.70	1.00	1.40	21.20	1011
4x25	7x2.20	1.20	1.60	25.50	1560
4x35	7x2.55	1.20	1.60	27.90	1984
5x1.5	1.37	0.70	1.20	11.10	204
5x2.5	1.74	0.80	1.20	12.70	286
5x4	2.20	0.80	1.40	14.40	397
5x6	2.70	0.80	1.40	15.70	517
5x10	7x1.34	1.00	1.40	20.40	865
5x16	7x1.70	1.00	1.60	23.80	1231
5x25	7x2.20	1.20	1.60	28.00	1906
5x35	7x2.55	1.20	1.60	30.70	2433

