


"Twist" Connector

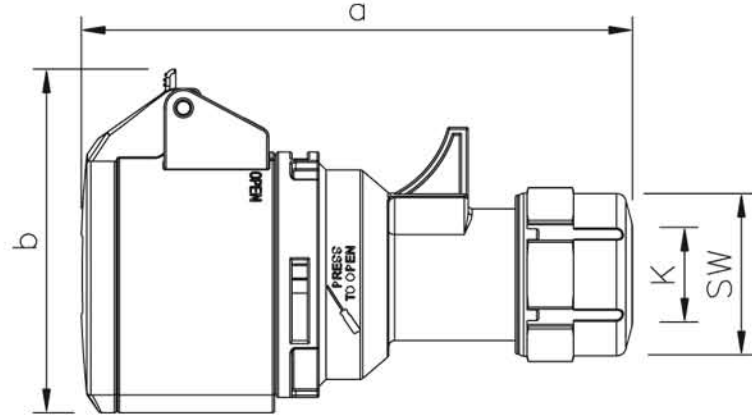

- hinged lid with grip
- to order nickel-plated contacts please add a "v" e.g. 213-6v

IP44 splashproof

Ampere	16	16	16	32	32	32
Pole	3	4	5	3	4	5
a	129	135	142	159	159	165
b	76	80	89	92	92	98
K	6-15	6-15	8-16	10-20	10-20	12-22
SW	38	38	42	50	50	50
Gewicht in Gramm	137	161	183	225	244	278
Term						
Kontaktschrauben						
Leitung						

Ampere	Pole	110V~ 50/60Hz 4h Best.Nr.	230V~ 50/60Hz 3p=6h 4p+5p=9h Best.Nr.	400V~ 50/60Hz 3p=9h 4p+5p=9h Best.Nr.	500V~ 50/60Hz 7h Best.Nr.	>50- 500V~ 100-300Hz 10h Best.Nr.	>50- 500V~ 301-500Hz 2h Best.Nr.
16	3	213-4	213-6	213-9	213-7	213-10	213-2
16	4	214-4	214-9	214-6	214-7	214-10	214-2
16	5	215-4	215-9	215-6	215-7	215-10	215-2
32	3	223-4	223-6	223-9	223-7	223-10	223-2
32	4	224-4	224-9	224-6	224-7	224-10	224-2
32	5	225-4	225-9	225-6	225-7	225-10	225-2