


"Twist" Plug

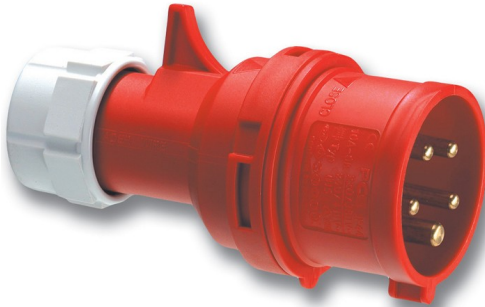

- to order nickel-plated contacts please add a "v" e.g. 015-6v

IP44 splashproof

<b>Ampere</b>	16	16	16	32	32	32
<b>Pole</b>	3	4	5	3	4	5
a	118	124	131	146	146	152
b	82	88	95	100	100	106
c	47	53	61	63	63	70
K	6-15	6-15	8-16	10-20	10-20	12-22
SW	38	38	42	50	50	50
Gewicht in Gramm	104	127	150	181	200	230
Term						
Kontaktschrauben	100 Ncm	100 Ncm	100 Ncm	110 Ncm	110 Ncm	110 Ncm
Leitung	1-2,5	1-2,5	1-2,5	2,5-6	2,5-6	2,5-6

Ampere	Pole	<b>110V~</b> 50/60Hz 4h <b>Best.Nr.</b>	<b>230V~</b> 50/60Hz 3p=6h 4p+5p=9h <b>Best.Nr.</b>	<b>400V~</b> 50/60Hz 3p=9h 4p+5p=6h <b>Best.Nr.</b>	<b>500V~</b> 50/60Hz 7h <b>Best.Nr.</b>	<b>&gt;50-500V~</b> 100-300Hz 10h <b>Best.Nr.</b>	<b>&gt;50-500V~</b> 301-500Hz 2h <b>Best.Nr.</b>
16	3	013-4	013-6	013-9	013-7	013-10	013-2
16	4	014-4	014-9	014-6	014-7	014-10	014-2
16	5	015-4	015-9	015-6	015-7	015-10	015-2
32	3	023-4	023-6	023-9	023-7	023-10	023-2
32	4	024-4	024-9	024-6	024-7	024-10	024-2
32	5	025-4	025-9	025-6	025-7	025-10	025-2