


"Power Twist" Plug

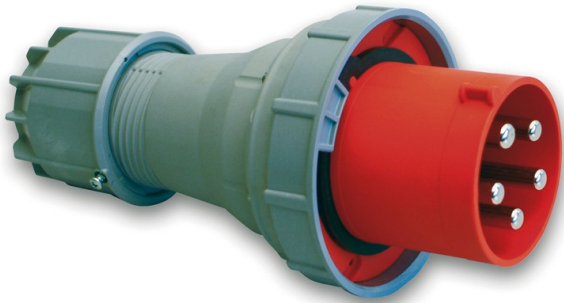

- with Twist cable gland
- nickel-plated contacts, with [pilot contact](#)

IP66/67 splashproof

Ampere	63	63	63
Pole	3	4	5
a	257	257	257
b	114	114	114
K	14,5-36	14,5-36	14,5-36
Gewicht in Gramm	547	596	650
Term			
Kontaktschrauben			
Leitung			

Ampere	Pole	110V~ 50/60Hz 4h Best.Nr.	230V~ 50/60Hz 3p=6h 4p+5p=9h Best.Nr.	400V~ 50/60Hz 3p=9h 4p+5p=6h Best.Nr.	500V~ 50/60Hz 7h Best.Nr.	>50- 500V~ 100-300Hz 10h Best.Nr.	>50- 500V~ 301-500Hz 2h Best.Nr.
63	3	033-4	033-6	033-9	033-7	033-10	033-2
63	4	034-4	034-9	034-6	034-7	034-10	034-2
63	5	035-4	035-9	035-6	035-7	035-10	035-2