


"Power Twist" Plug

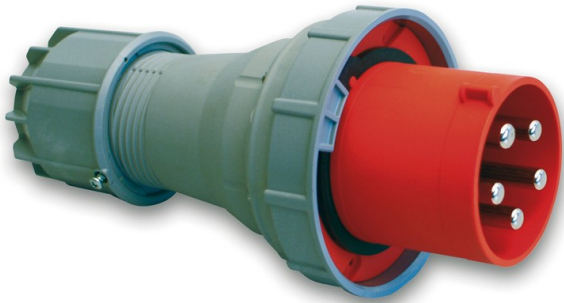

- with Twist cable gland
- nickel-plated contacts, with [pilot contact](#)

IP66/67 watertight

Ampere	125	125	125
Pole	3	4	5
a	270	270	270
b	131	131	131
K	22,5-30	22,5-50	22,5-50
Gewicht in Gramm	1318	1433	1545
Term			
Kontaktschrauben			
Leitung			

Ampere	Pole	110V~ 50/60Hz 4h Best.Nr.	230V~ 50/60Hz 3p=6h 4p+5p=9h Best.Nr.	400V~ 50/60Hz 3p=9h 4p+5p=6h Best.Nr.	500V~ 50/60Hz 7h Best.Nr.	>50- 500V~ 100-300Hz 10h Best.Nr.	>50- 500V~ 301-500Hz 2h Best.Nr.
125	3	043-4	043-6	043-9	043-7	043-10	043-2
125	4	044-4	044-9	044-6	044-7	044-10	044-2
125	5	045-4	045-9	045-6	045-7	045-10	045-2