


"Power Twist" Wall mounted plug

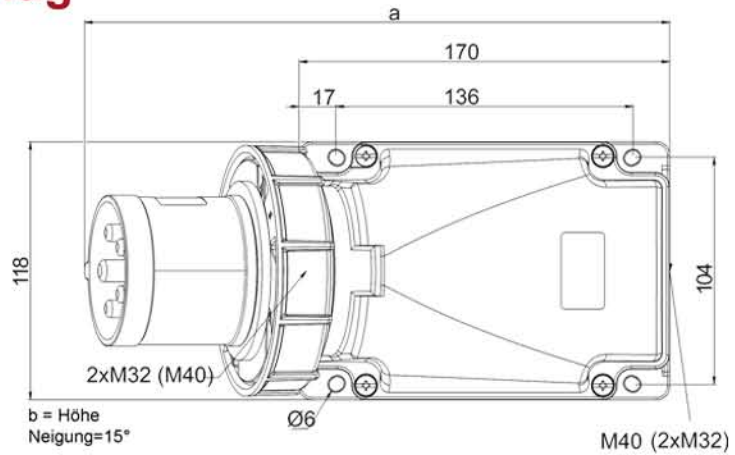

housing dimensions: HxWxD = 170x118x271; 1xM40; 2xM32

- top, bottom or rear entry
- 180° rotatable housing
- nickel-plated contacts, with [pilot contact](#)
- for waterproof cover and cable-glands please see accessories
- incl. blank cable gland

IP66/67 watertight

Ampere	63	63	63
Pole	3	4	5
a	271	271	271
b	175	175	175
Gewicht in Gramm	812	864	914
Term			
Kontaktschrauben			
Leitung			

Ampere	Pole	110V~ 50/60Hz 4h Best.Nr.	230V~ 50/60Hz 3p=6h 4p+5p=9h Best.Nr.	400V~ 50/60Hz 3p=9h 4p+5p=6h Best.Nr.	500V~ 50/60Hz 7h Best.Nr.	>50- 500V~ 100-300Hz 10h Best.Nr.	>50- 500V~ 301-500Hz 2h Best.Nr.
63	3	533-4	533-6	533-9	533-7	533-10	533-2
63	4	534-4	534-9	534-6	534-7	534-10	534-2
63	5	535-4	535-9	535-6	535-7	535-10	535-2