


Wall mounted plug

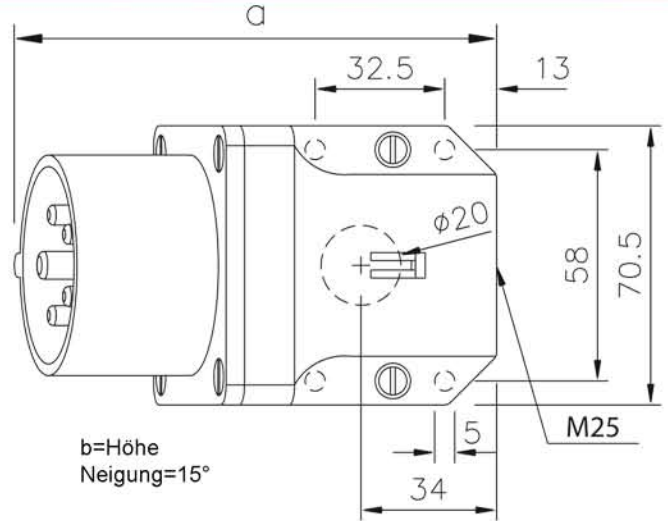

- top and rear entry
- to order nickel-plated contacts please add a "v" e.g. 513-6v
- incl. cable gland

IP44 splashproof

Ampere	16	16	16	32	32	32
Pole	3	4	5	3	4	5
a	121	121	123	131	131	132
b	76	76	79	83	83	86
Gewicht in Gramm	176	195	213	231	251	274
Term						
Kontaktschrauben						
Leitung						

Ampere	Pole	110V~ 50/60Hz 4h Best.Nr.	230V~ 50/60Hz 3p=6h 4p+5p=9h Best.Nr.	400V~ 50/60Hz 3p=9h 4p+5p=6h Best.Nr.	500V~ 50/60Hz 7h Best.Nr.	>50- 500V~ 100-300Hz 10h Best.Nr.	>50- 500V~ 301-500Hz 2h Best.Nr.
16	3	513-4	513-6	513-9	513-7	513-10	513-2
16	4	514-4	514-9	514-6	514-7	514-10	514-2
16	5	515-4	515-9	515-6	515-7	515-10	515-2
32	3	523-4	523-6	523-9	523-7	523-10	523-2
32	4	524-4	524-9	524-6	524-7	524-10	524-2
32	5	525-4	525-9	525-6	525-7	525-10	525-2