


"Twist" Flanged plug angled

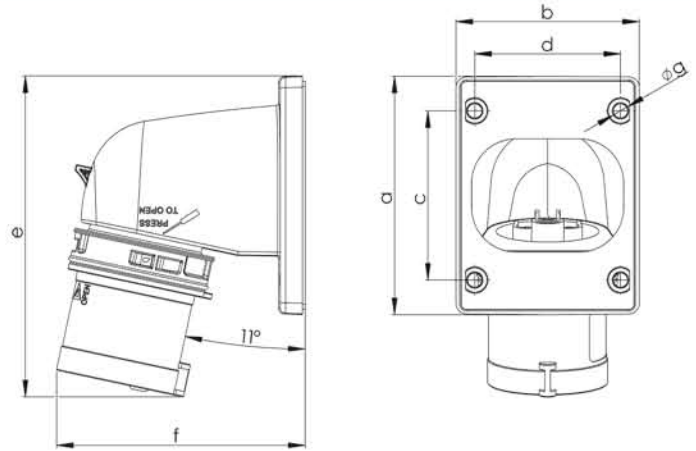

- to order nickel-plated contacts please add a "v" e.g. 77713-6v
- to order Turbo Twist design (screwless connection technology) please add "TT" e.g. 77713-6TT

IP44 splashproof

Ampere	16	16	16	32	32	32
Pole	3	4	5	3	4	5
a	86	86	100	100	100	100
b	66	66	90	90	90	90
c	61	61	85	85	85	85
d	53	53	77	77	77	77
e	116	117	153	163	163	164
f	90	93	98	100	100	103
g	5	5	5	5	5	5
Gewicht in Gramm	129	143	187	200	220	244
Term						
Kontaktschrauben						
Leitung						

Ampere Pole

110V~
50/60Hz
4h
Best.Nr.

230V~
50/60Hz
3p=6h
4p+5p=9h
Best.Nr.

400V~
50/60Hz
3p=9h
4p+5p=9h
Best.Nr.

500V~
50/60Hz
7h
Best.Nr.

**>50-
500V~**
100-300Hz
10h
Best.Nr.

**>50-
500V~**
301-500Hz
2h
Best.Nr.

16	3	77713-4	77713-6	77713-9	77713-7	77713-10	77713-2
16	4	77714-4	77714-9	77714-6	77714-7	77714-10	77714-2
16	5	77715-4	77715-9	77715-6	77715-7	77715-10	77715-2
32	3	77723-4	77723-6	77723-9	77723-7	77723-10	77723-2
32	4	77724-4	77724-9	77724-6	77724-7	77724-10	77724-2
32	5	77725-4	77725-9	77725-6	77725-7	77725-10	77725-2