


Wall socket

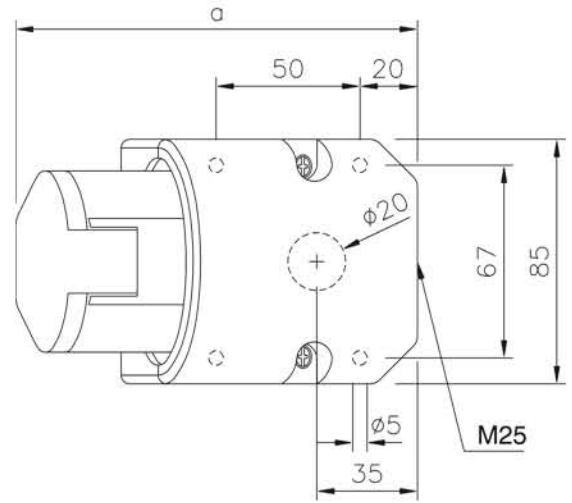

- top and rear entry
- to order nickel-plated contacts please add a "v" e.g. 113-6v

IP44 splashproof

Ampere	16	16	16	32	32	32
Pole	3	4	5	3	4	5
a	140	141	139	152	152	153
b	89	92	97	100	100	105
M	25	25	25	25	25	25
Gewicht in Gramm	228	248	258	279	295	324
Term						
Kontaktschrauben						
Leitung						

Ampere	Pole	110V~ 50/60Hz 4h Best.Nr.	230V~ 50/60Hz 3p=6h 4p+5p=9h Best.Nr.	400V~ 50/60Hz 3p=9h 4p+5p=9h Best.Nr.	500V~ 50/60Hz 7h Best.Nr.	>50- 500V~ 100-300Hz 10h Best.Nr.	>50- 500V~ 301-500Hz 2h Best.Nr.
16	3	113-4	113-6	113-9	113-7	113-10	113-2
16	4	114-4	114-9	114-6	114-7	114-10	114-2
16	5	115-4	115-9	115-6	115-7	115-10	115-2
32	3	123-4	123-6	123-9	123-7	123-10	123-2
32	4	124-4	124-9	124-6	124-7	124-10	124-2
32	5	125-4	125-9	125-6	125-7	125-10	125-2